
TERMOPLAST

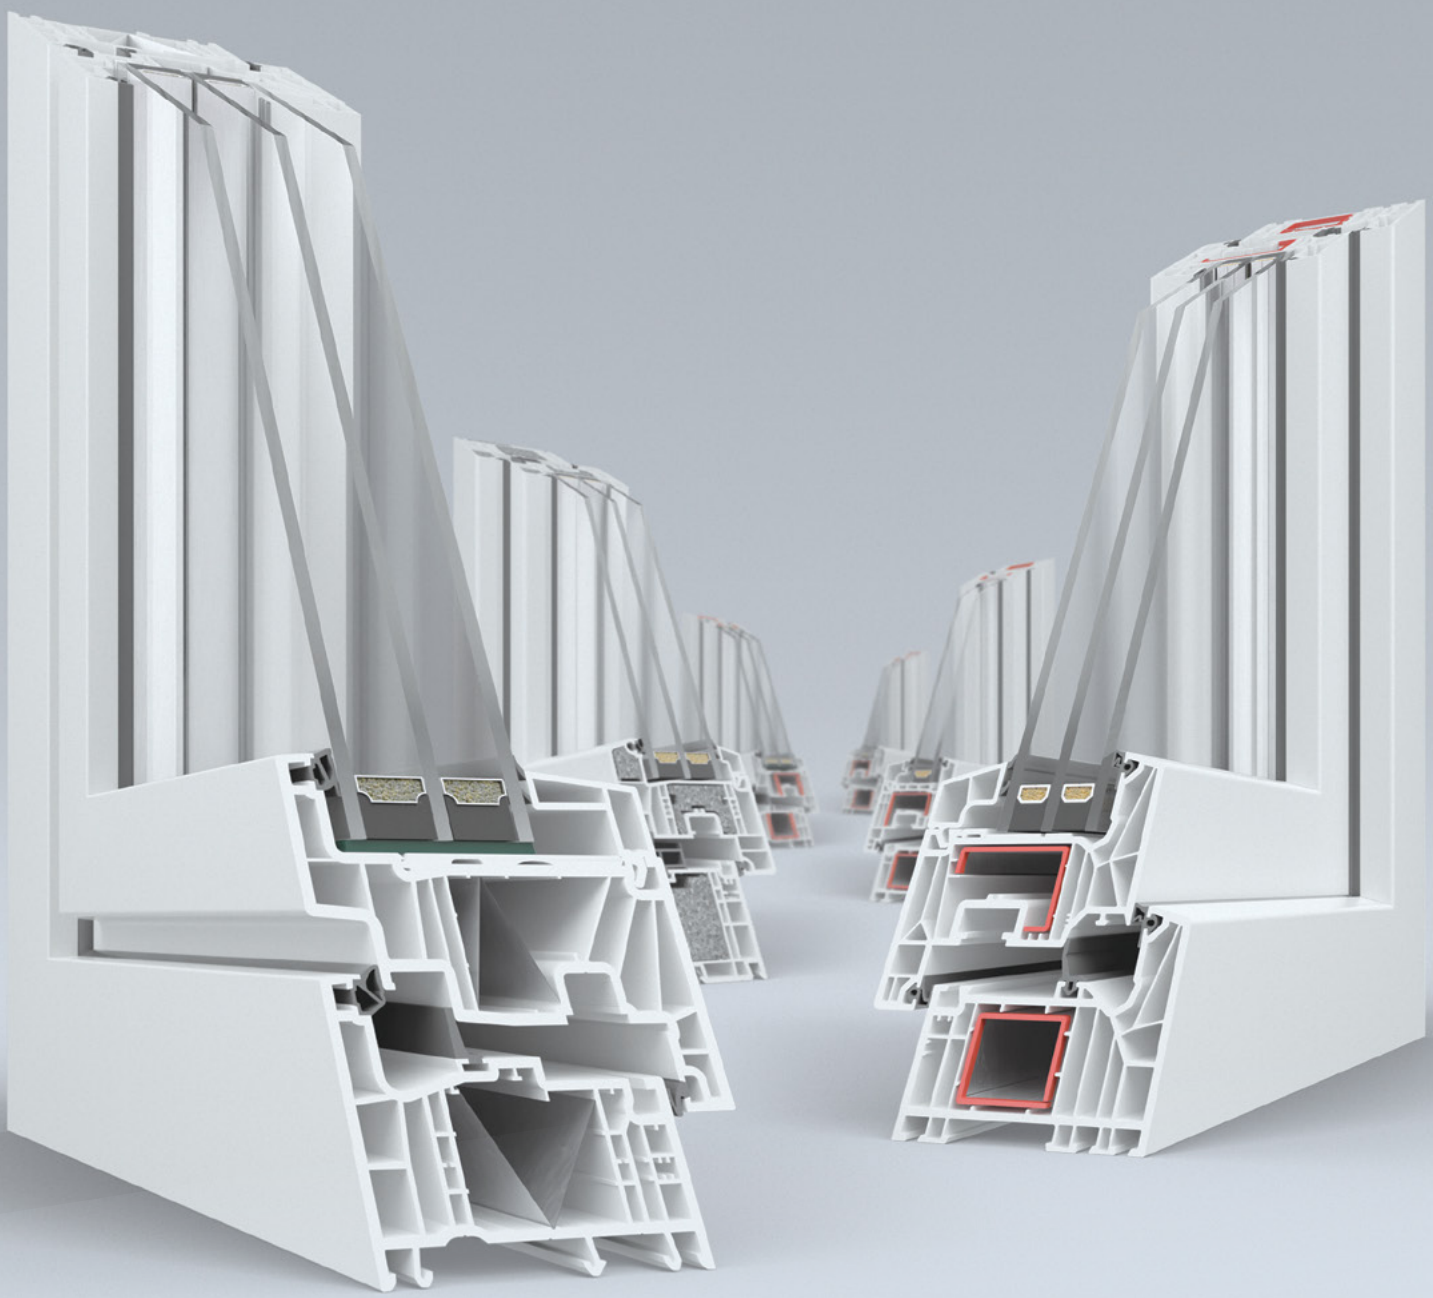

TRP Product line

Beautiful windows
INNOVATIVE SOLUTIONS

www.termoplast.us

@termoplastromania

TERMOPLAST



Systems for windows and doors

Our agents can guide you to the optimal solution for your project. **Contact us at +40 755 067 776!**

CHARACTERISTICS	REHAU 70
Profile manufacturer	REHAU
Profile materials	PVC
Profile thermal coefficient Uf (w/m^{2}K)	≥1.3
Frame depth (mm)	70
Frame height (mm)	64 / 68
Number of sash rooms	5
Number of frame rooms	5
Number of frame seals	2
Window sash design	Straight / Rounded
Slim sash	–
Renovation frame on white body (mm)	40 / 60
Renovation frame on grey body (mm)	–
Renovation frame on brown body (mm)	40 / 60
Renovation frame on caramel body (mm)	–
Clip-on wing (mm)	40 / 60
Thermomodule / LowE Film	–
Fixture (mm)	1.5 / 2 / 2.5
PVC moulding type	Straight
Base body colour	white / brown
Gaskets colour on white body	grey
COLOURS	
White - anthracite grey / anthracite grey	on white body
White - anthracite grey glossy/anthracite grey glossy	on white body / brown body*
Walnut	on brown body
Golden Oak	on brown body
Weiss bianco	on white body
Mooreiche, black	on brown body
Non-standard colours on stock body	on white body / brown*
Welding technology type	classic/invisible
Anthracite grey aluminium plating	–
Aluminium plating other colours	–
Concealed hinges	Yes
Handles	Hoppe
Types of aluminium threshold (mm)	20
Extensions (mm)* ***and multiples***	20 / 40 / 60 / 100
Mounting height (mm)	30
Arched frames	plus 5 - 8 days*
Soundproofing	up to 45 dB
Glazing thickness (mm)	24 / 32 / 40
Sheets of glass	2/3

*Delivery times 3-12 days more than standard

**Details at TRP consultants

CHARACTERISTICS	SCHÜCO 70
Profile manufacturer	SCHÜCO
Profile materials	PVC
Profile thermal coefficient Uf (w/m^{2}K)	≥1.3
Frame depth (mm)	70
Frame height (mm)	68
Number of sash rooms	5
Number of frame rooms	5
Number of frame seals	2
Window sash design	Straight
Slim sash	Yes
Renovation frame on white body (mm)	30 / 58
Renovation frame on grey body (mm)	30 / 58
Renovation frame on brown body (mm)	–
Renovation frame on caramel body (mm)	30 / 58
Clip-on wing (mm)	50
Thermomodule / LowE Film	–
Fixture (mm)	1.5 / 2
PVC moulding type	Straight
Base body colour	white / grey / caramel
Gaskets colour on white body	grey
COLOURS	
White - anthracite grey / anthracite grey	on white body / grey body *
White - anthracite grey glossy/anthracite grey glossy	on white body / grey body
Walnut	on grey body
Golden Oak	on caramel body
Weiss bianco	on white body
Mooreiche, black	on white body*
Non-standard colours on stock body	on white body / grey / caramel*
Welding technology type	classic/invisible/HFL
Anthracite grey aluminium plating	–
Aluminium plating other colours	–
Concealed hinges	Yes
Handles	Schüco, Hoppe
Types of aluminium threshold (mm)	20
Extensions (mm)* ***and multiples***	15 / 50 /120
Mounting height (mm)	30
Arched frames	plus 5 - 8 days*
Soundproofing	up to 46 dB
Glazing thickness (mm)	24 / 28 / 40
Sheets of glass	2/3

*Delivery times 3-12 days more than standard

**Details at TRP consultants

CHARACTERISTICS	REHAU 80
Profile manufacturer	REHAU
Profile materials	PVC
Profile thermal coefficient Uf (w/m^{2}K)	≥1.0
Frame depth (mm)	80
Frame height (mm)	72
Number of sash rooms	6
Number of frame rooms	6
Number of frame seals	3
Window sash design	Straight
Slim sash	–
Renovation frame on white body (mm)	40
Renovation frame on grey body (mm)	–
Renovation frame on brown body (mm)	40
Renovation frame on caramel body (mm)	–
Clip-on wing (mm)	40 / 60
Thermomodule / LowE Film	–
Fixture (mm)	1.5 / 2 / 2.5
PVC moulding type	Straight
Base body colour	white / brown
Gaskets colour on white body	grey
COLOURS	
White - anthracite grey / anthracite grey	on white body
White - anthracite grey glossy/anthracite grey glossy	on white body / brown body*
Walnut	on brown body
Golden Oak	on brown body
Weiss bianco	on white body*
Mooreiche, black	on brown body
Non-standard colours on stock body	on white body / brown*
Welding technology type	classic/invisible
Anthracite grey aluminium plating	plus 3 - 5 days**
Aluminium plating other colours	plus 15 - 25 days
Concealed hinges	Yes
Handles	Hoppe
Types of aluminium threshold (mm)	20
Extensions (mm)* ***and multiples***	20 / 45 / 60 / 100
Mounting height (mm)	30
Arched frames	plus 5 - 8 days*
Soundproofing	up to 46 dB
Glazing thickness (mm)	34 / 42 / 50
Sheets of glass	2/3

*Delivery times 3-12 days more than standard

**Details at TRP consultants

CHARACTERISTICS	SCHÜCO 82
Profile manufacturer	SCHÜCO
Profile materials	PVC
Profile thermal coefficient Uf (w/m^{2}K)	≥0.96
Frame depth (mm)	82
Frame height (mm)	70
Number of sash rooms	7
Number of frame rooms	7
Number of frame seals	3
Window sash design	Straight / Rounded
Slim sash	–
Renovation frame on white body (mm)	50
Renovation frame on grey body (mm)	50
Renovation frame on brown body (mm)	–
Renovation frame on caramel body (mm)	–
Clip-on wing (mm)	50
Thermomodule / LowE Film	–
Fixture (mm)	1.5 / 2
PVC moulding type	Straight
Base body colour	white / grey
Gaskets colour on white body	grey, black
COLOURS	
White - anthracite grey / anthracite grey	on white body / grey body*
White - anthracite grey glossy/anthracite grey glossy	on white body / grey body
Walnut	on white body
Golden Oak	on grey body
Weiss bianco	on white body
Mooreiche, black	on grey body*
Non-standard colours on stock body	on white body / grey*
Welding technology type	classic/invisible
Anthracite grey aluminium plating	–
Aluminium plating other colours	–
Concealed hinges	Yes
Handles	Schüco, Hoppe
Types of aluminium threshold (mm)	20
Extensions (mm)* ***and multiples***	30 / 50 / 120
Mounting height (mm)	Schüco 60 with seal and barrier
Arched frames	plus 15 - 25 days*
Soundproofing	up to 47 dB
Glazing thickness (mm)	28 / 36 / 44 / 52
Sheets of glass	2/3

*Delivery times 3-12 days more than standard

**Details at TRP consultants

CHARACTERISTICS	NEW ECO REHAU ARTEVO
Profile manufacturer	REHAU
Profile materials	RAU FIPRO
Profile thermal coefficient Uf (w/m^{2}K)	≥0.60
Frame depth (mm)	80
Frame height (mm)	65
Number of sash rooms	5-8
Number of frame rooms	7
Number of frame seals	3
Window sash design	Straight / Coplanar
Slim sash	–
Renovation frame on white body (mm)	40
Renovation frame on grey body (mm)	–
Renovation frame on brown body (mm)	–
Renovation frame on caramel body (mm)	–
Clip-on wing (mm)	40 / 60
Thermomodule / LowE Film	LowE Film
Fixture (mm)	1.5 / 2 / 2.5
PVC moulding type	Straight
Base body colour	white / (grey, brown)**
Gaskets colour on white body	grey
COLOURS	
White - anthracite grey / anthracite grey	on white body / brown body / grey body*
White - anthracite grey glossy/anthracite grey glossy	on white body*
Walnut	on brown body*
Golden Oak	on brown body*
Weiss bianco	on white body*
Mooreiche, black	on brown body*
Non-standard colours on stock body	on white body*
Welding technology type	invisible
Anthracite grey aluminium plating	–
Aluminium plating other colours	–
Concealed hinges	Yes
Handles	Hoppe
Types of aluminium threshold (mm)	20
Extensions (mm)* ***and multiples***	20 / 45 / 60 / 100
Mounting height (mm)	30
Arched frames	plus 5 - 8 days*
Soundproofing	up to 48 dB
Glazing thickness (mm)	34 / 56
Sheets of glass	2/3

*Delivery times 3-12 days more than standard

**Details at TRP consultants

TERMOPLAST



Sliding systems

Our agents can guide you to the optimal solution for your project. **Contact us at +40 755 067 776!**

CHARACTERISTICS	SYNEGO SLIDE
Profile manufacturer	REHAU
Series type	TRP 80
Thermal coefficient Uf (w/m^{2}K)	≥1.3
Frame depth (mm)	156
Number of frame seals	1
Maximum weight on sash(kg)	250
Maximum height (mm)	2500 white / 2300 coloured
Maximum frame length (mm)	4000 white / 4000 coloured
Maximum sash length (mm)	2000 white / 2000 coloured
Sash design	straight
Fixture (mm)	1.5 - 2.5
Base body colored	white
Seal colored on white body	grey
Standard colours*	plus 5-10 days**
Non-standard colours	plus 5-12 days**
Welding technology type	classic
Anthracite grey aluminium plating	–
Aluminium plating other colours	–
Soundproofing	up to 44
Glazing thickness (mm)	34 / 42 / 50
Sheets of glass	2/3

*Standard colours: walnut, anthracite grey, smooth anthracite grey, golden oak, weiss bianco, mooriche, black.

**Number of days in addition to the standard delivery time.

CHARACTERISTICS	SYNEGO HST
Profile manufacturer	REHAU
Series type	TRP 80
Thermal coefficient Uf (w/m^{2}K)	≥1.3
Frame depth (mm)	190
Number of frame seals	2
Maximum weight on sash(kg)	400
Maximum height (mm)	2600 white / 2500 coloured
Maximum frame length (mm)	10000 white / 6800 coloured
Maximum sash length (mm)	3000 white / 2500 coloured
Sash design	straight
Fixture (mm)	2
Base body colored	white
Seal colored on white body	grey
Standard colours*	plus 5-10 days**
Non-standard colours	plus 5-12 days**
Welding technology type	classic
Anthracite grey aluminium plating	plus 3-5 days**
Aluminium plating other colours	plus 15-25 days
Soundproofing	up to 43
Glazing thickness (mm)	34 / 42 / 50
Sheets of glass	2/3

*Standard colours: walnut, anthracite grey, smooth anthracite grey, golden oak, weiss bianco, mooriche, black.

**Number of days in addition to the standard delivery time.

CHARACTERISTICS	SLIDING TILT-AND-TURN SYSTEM
Profile manufacturer	REHAU SCHÜCO
Series type	All series
Thermal coefficient Uf (w/m^{2}K)	1.0 - 1.3
Frame depth (mm)	70 / 80 / 82
Number of frame seals	2/3
Maximum weight on sash(kg)	200
Maximum height (mm)	2400 white/2400 coloured (Rehau/Schüco 70, 80 ,82) 2600 white/2600 coloured (Artevo)
Maximum frame length (mm)	4000 white/ 3000 coloured
Maximum sash length (mm)	1400 white/1400 coloured (Rehau/Schüco 70, 80 ,82) 2000 white/2000 coloured (Artevo)
Sash design	straight / rounded / faceted
Fixture (mm)	1.5 - 2.5
Base body colored	white, brown, grey
Seal colored on white body	white, grey, brown
Standard colours*	plus 2-5 days **
Non-standard colours	plus 5-12 days**
Welding technology type	classic/invisible
Anthracite grey aluminium plating	plus 2-5 days for Rehau**
Aluminium plating other colours	plus 15 - 25 days
Soundproofing	40-45
Glazing thickness (mm)	24 - 52
Sheets of glass	2/3

*Standard colours: walnut, anthracite grey, smooth anthracite grey, golden oak, weiss bianco, mooriche, black.

**Number of days in addition to the standard delivery time.

CHARACTERISTICS	HARMONIC SYSTEM
Profile manufacturer	REHAU
Series type	Synego 80
Thermal coefficient Uf (w/m^{2}K)	>1.1
Frame depth (mm)	80
Number of frame seals	2
Maximum weight on sash(kg)	50
Maximum height (mm)	2400 white / 2400 coloured
Maximum frame length (mm)	4000 white / 3000 coloured
Maximum sash length (mm)	4000 white / 3000 coloured
Sash design	straight
Fixture (mm)	2
Base body colored	white
Seal colored on white body	white, grey, brown
Standard colours*	plus 8-15 days **
Non-standard colours	plus 8-15 days **
Welding technology type	classic/invisible
Anthracite grey aluminium plating	–
Aluminium plating other colours	–
Soundproofing	46
Glazing thickness (mm)	50
Sheets of glass	2/3

*Standard colours: walnut, anthracite grey, smooth anthracite grey, golden oak, weiss bianco, mooriche, black.

**Number of days in addition to the standard delivery time.

CHARACTERISTICS	NEW SLINOVA 80
Profile manufacturer	REHAU
Series type	Slinova
Thermal coefficient Uf (w/m^{2}K)	≥1.8
Frame depth (mm)	80, 146
Number of frame seals	2 brush seals
Maximum weight on sash(kg)	140
Maximum height (mm)	2600 white / 2450 coloured
Maximum frame length (mm)	4500 white / 4200 coloured
Maximum sash length (mm)	2000 white / 2000 coloured
Sash design	straight
Fixture (mm)	1.5 - 2.5
Base body colored	white
Seal colored on white body	grey
Standard colours*	plus 5-12 days**
Non-standard colours	plus 5-12 days**
Welding technology type	classic
Anthracite grey aluminium plating	-
Aluminium plating other colours	-
Soundproofing	up to 33
Glazing thickness (mm)	24 / 32
Sheets of glass	2

*Standard colours: walnut, anthracite grey, smooth anthracite grey, golden oak, weiss bianco, mooriche, black.

**Number of days in addition to the standard delivery time.